




MS



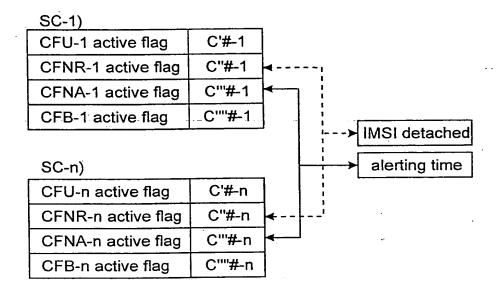



The first of the f

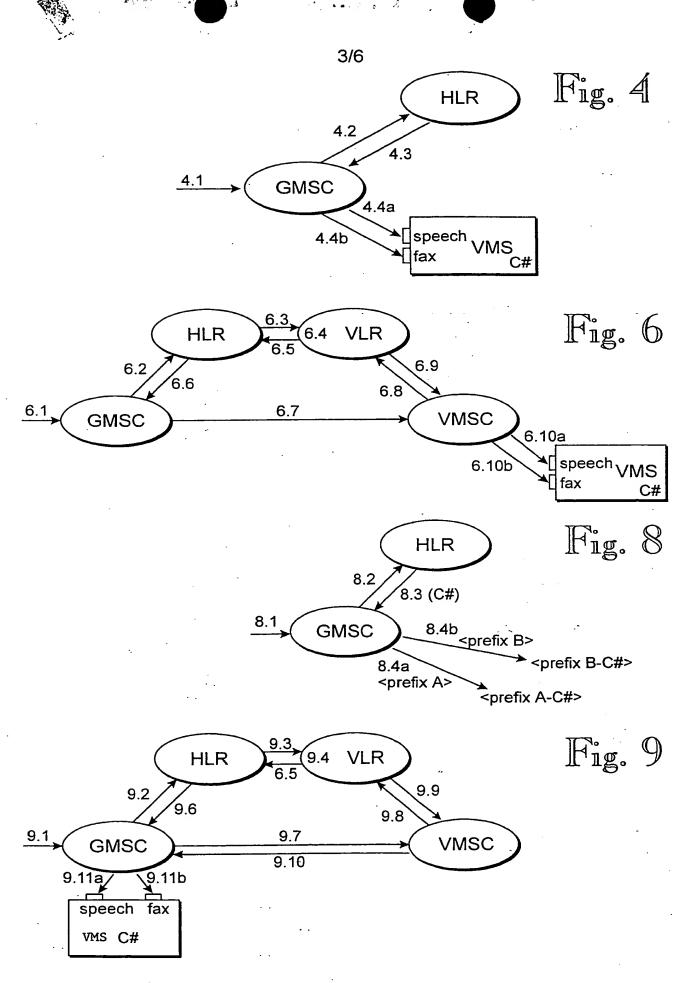

```
SendRoutingInfoResE ::= SEQUENCE (
imsi
                               IMSI,
                               RoutingInfo,
routingInfo
cug-CheckInfo
                               CUG-CheckInfo
                                                  OPTIONAL,
pni
                               Pnplndex
                                                  OPTIONAL,
sriResExtension
                [PRIVATE 0]
                               SriResExtension
                                                  OPTIONAL,
                 [PRIVATE 30]
                               ANSISriResExt
                                                  OPTIONAL
ansiSriResExt
...)
```

SriResExtension ::= [PRIVATE 0] SEQUENCE (			
inTriggerKey	[0]	InTriggerKey	OPTIONAL,
vlrNumber	[1]	ISDN-AddressString	OPTIONAL,
activeSs	[2]	ActiveSS-List	OPTIONAL,
traceReference	[3]	TraceReference	OPTIONAL,
traceType	[4]	TraceType	OPTIONAL,
omc-ld	[5]	AddressString	OPTIONAL,
hotBilling	[6]	BOOLEAN	OPTIONAL,
cfolsDone	[7]	BOOLEAN	OPTIONAL,
cflnCug	[8]	BOOLEAN	OPTIONAL,
basicService	[9]	BasicServiceCode	OPTIONAL,
category	[10]	Category	OPTIONAL,
routingCategory	[11]	RoutingCategory	OPTIONAL,
pnplndex	[12]	PnpIndex	OPTIONAL,
nokia-CUG	[13]	Nokia-CUG-Data	OPTIONAL,
noBarrings	[14]	NULL	OPTIONAL,
odb-Data	[15]	ODB-Data	OPTIONAL
)			•

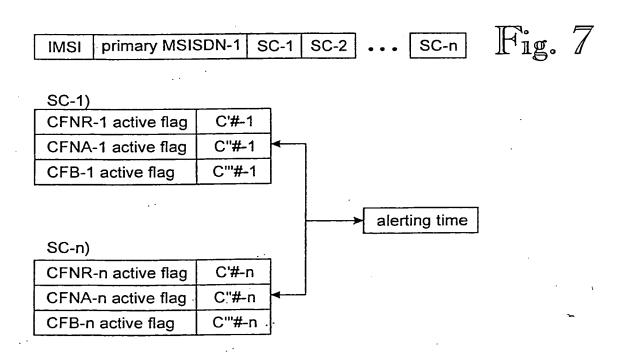

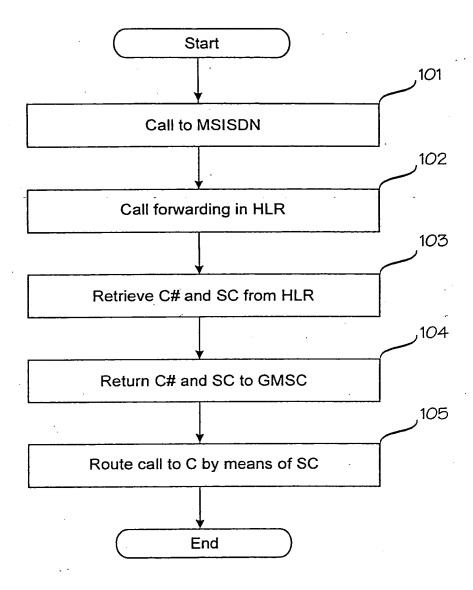

M

6/6

Fig. 11

